






Wireless table occupancy sensor

Get instant updates when people are detected and automatically monitor table occupancy.

Our wireless 360 degree motion sensors detect and monitor the presence of people, in real time. The small, battery-powered sensors simply stick to the underside of a table, enabling you to detect real-time presence and continually monitor table occupancy.


Features

-  Passive infrared (PIR) sensor detects motion within 360 degree field of view. Typical under-table detection range within 0.5 meters based on average table height. Actual detection range of the PIR is up to 5 meters.
-  Instant updates when occupancy detected, plus status updates can be configured between 10 minutes and 5 hours
-  Absence time out can be configured between 2 and 30 minutes
-  Ultra-low power technology. Battery life typically 5+ years.
-  Transmit data wirelessly and securely – using AES-128 encryption – via EnOcean wireless protocol, which uses internationally approved, licence-free ISM bands



Integrating sensor data


Our smart gateway receives near real-time data from all sensors within range, converts the raw data into an easy-to-use JSON format, then publishes it using MQTT protocol. Data can be sent - via Ethernet, LTE (4G) or WiFi – to any local or cloud MQTT broker; securely to IBM Watson IoT, Microsoft Azure IoT Hub or AWS IoT Core; directly into Google Sheets; or to a Node-RED application.

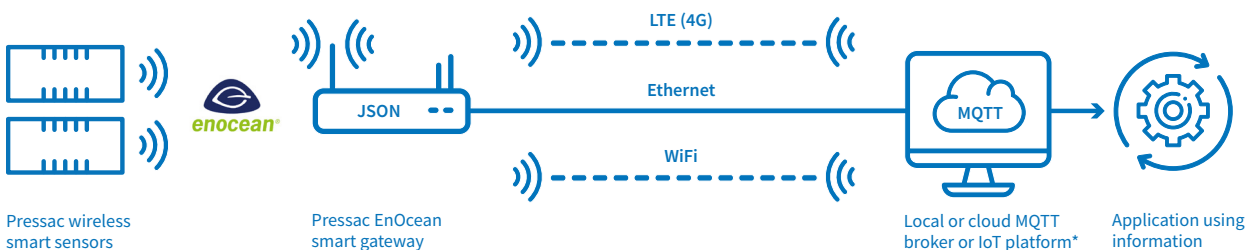

*Ready-made connections with:



Technical specification

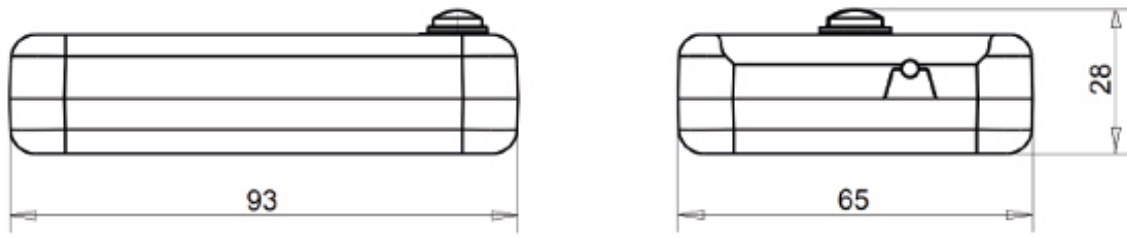

Measurement	<p>Transmission rate: reports presence detection in real time and status updates can be configured between 10 minutes and 5 hours</p> <p>Range: distance up to 5 meters within a 360 degree field of view</p> <p>Absence time out: configurable between 2 and 30 minutes</p> <p>Learn button: configurable ON/OFF</p> <p>LED motion detection indication: configurable ON/OFF</p>
Power specification	<p>Power: battery</p> <p>Battery type: AA size 3.6V Lithium</p> <p>Typical battery life: 5+ years</p>
Wireless specification	<p>Protocol: EnOcean</p> <p>Radio frequency:</p> <ul style="list-style-type: none"> • 868 MHz for Europe and other countries adopting RED • 902 MHz for USA (FCC specification) and Canada (IC specification) <p>Range: up to 30 metres in buildings and 300 metres in free field</p> <p>Telegram type: 4BS</p> <p>EnOcean Equipment Profile (EEP): A5-07-01</p> <p>Security: 128 AES encryption configurable ON/OFF</p> <p>Interoperability: EnOcean certification 3.0</p>
Enclosure specification	<p>Material: ABS plastic</p> <p>IP rating: IP2X</p> <p>Dimensions: 93 x 65 x 28 mm (approx)</p>
Installation	<p>Fixing: adhesive pads or screws provided</p> <p>Operating temperature: 0°C to +40°C</p> <p>Storage temperature: -20°C to +55°C</p> <p>Environment: indoor</p> <p>Calibration: not required</p>
Compliance	CE approved, RoHS compliant, FCC compliant
Part number	PIR_360_BAT_WE_E868_S[868]-[902]_[S]-[B]



If you're looking for a partner who offers quality solutions in high volumes – get in touch

Call us: +44 (0)115 936 5200

Email us: Info@pressac.com

Visit us: www.pressac.com